


External Lighting

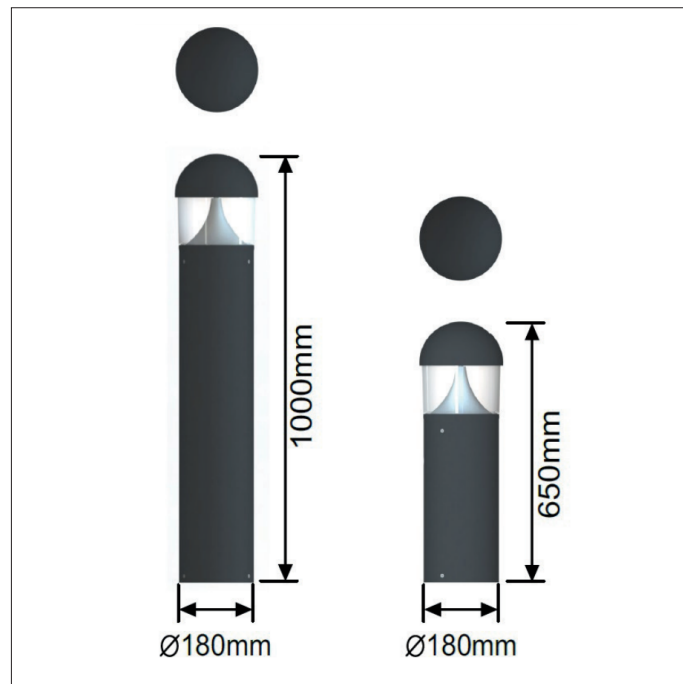

Accessories

Part No.	W	Lm	Height (mm)	CRI
HAM/6/1780/4	17	1703	400mm	80
HAM/10/1780/4	17	1780	700mm	80

For more information, please contact Sales@ldl.lighting

Key Features

- IP65 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 100,000 h (L90/B50)
- Colour stability with 3 step MacAdam

- For black option suffix /BLK
- For grey option suffix /GRY
- For white option suffix /WHI
- For asymmetric optic suffix /AS

i.e. SID/1780/4/BLK =
SID Symmetrical LED Bollard, 1780lm, 4000K, Black.

Accessories

- Root Attachment /SID/ROOT