




# Street Medium

## Post Top

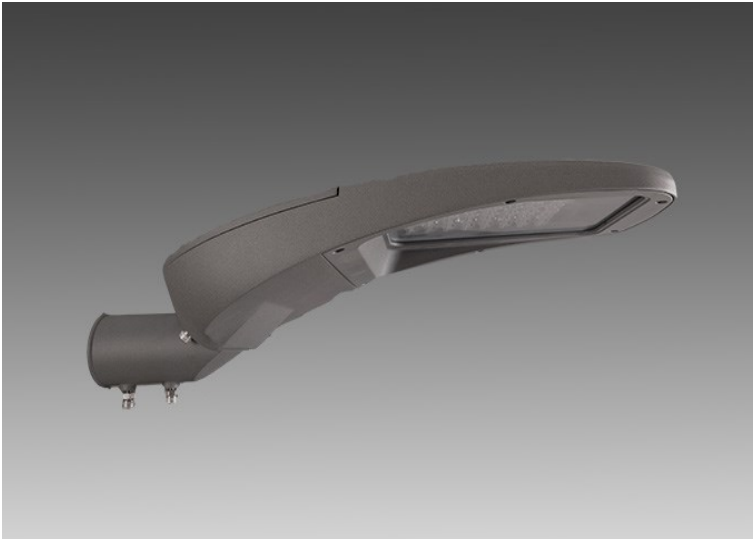

- Efficacies up to 146 lm/W
- Impact rating of IK08
- Nominal life of 120,000 hours (L80, B10)
- IP66 Suitable for external environments
- Operating Temperature from -40 to +50°
- Installation Height 6-8m
- Net Weight 5.5kg
- 4000K as standard
- Spigot size—Ø 60mm

### To Specify:

Select Part Number with additional options if required

AS1 Lens	Lm	W	Lm/W	CCT
ST/M/AS1/3916/4	3916	26	146	4000K
ST/M/AS1/5477/4	5477	38	142	4000K
ST/M/AS1/6549/4	6549	46	141	4000K
ST/M/AS1/7406/4	7406	54	136	4000K

